

Where It All Began

In 1997, SpitzLift Founder, Michael Spitsbergen saw a need for a revolutionary tool. At the time, Michael owned a construction company that was managing large construction projects. He would often rely on a large crane to do the work he knew a small crane could do. Michael needed a small, lightweight crane that a worker could easily throw over their shoulder, climb to the roof, mount, and lift needed supplies. He thought it senselss, and overly expensive, to bring in a large crane when a small crane was better suited for the job. At the time, however, a crane of this sort did not exist. So, the ever resourceful and entrepreneurial, Michael invented one. It got the job done efficiently and safely; saving time and money. He patented his crane, took it to market, and SpitzLift Manufacturing was officially founded in 1999. Today, thousands of SpitzLift cranes are being used worldwide.



CONTENTS

VANS 3-12



ENCLOSED SERVICE BODIES

13-14



SERVICE BODIES

15-16



PICK-UP TRUCKS

17-18



PLATFORM TRUCKS

19-20




SOLUTION PROCESS

IDENTIFY RELATIONSHIP

We determine customer relationship. Identify all involved parties and establish roles. Review timeline requirements.

EVALUATE SOLUTION

SpitzLift team works collaboratively
with stakeholder groups to evaluate
application through site visits,
application simulations, and meetings.
Once evaluated, we provide the
solution that best meets

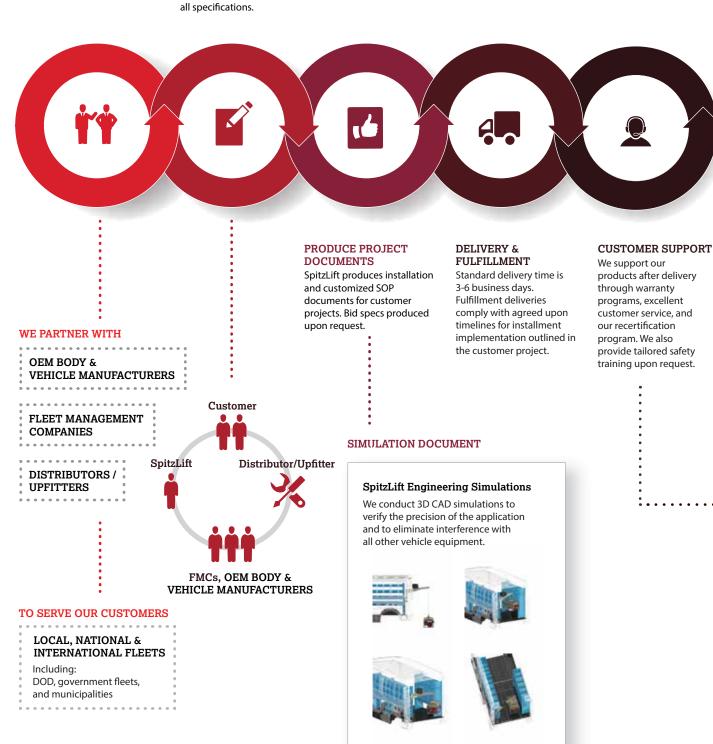

SOLUTION COMPONENTS

SERVICE VEHICLE CRANE OPTIONS

- · Length: 3 ft. or 4 ft.
- Manual crane with load control built-in brake
- Electric Crane: DC or AC (lifting speed 22 ft. per/min.)

ADDITIONAL OPTIONS

- $\bullet\, \mathsf{Strap}; \, \mathsf{2''}\, \mathsf{UV}\, \mathsf{resistant}\, \, \mathsf{webbing}. \, \mathsf{Abrasion}\, \mathsf{resistant}\, \, \mathsf{edge}$
- Wire rope: 3/16" aircraft-grade cable. 3600 lbs. rating
- Synthetic rope: 3/16" 4900 lbs. rating. Non-rotational, fatigue, abrasion, UV & wear resistant

SAFETY FEATURES OF ELECTRIC CRANES

- Safety release auxiliary handle
- Circuit breaker system for overload protection
- Dynamic and disc brake dual load control system

SPITZLIFT FEATURES

SPITZLIFT:

- Meets ASME, OSHA, and CE standards
- Every crane is tested and comes with a load test certificate
- Custom solutions are available to meet specialty applications
- Components are manufactured according to ISO compliance
- Vehicle specific mounts and installation hardware kits are provided

WARRANTY & RECERTIFICATION PROGRAM

2 YEAR STANDARD WARRANTY

(Will match OEM warranty up to 6 years)
SpitzLift is backed by comprehensive product liability insurance

WARRANTY RECERTIFICATION

Our recertification program extends the life of SpitzLift cranes and ensures all safety specifications are met. We recommend cranes be recertified every 24 months. Service includes replacement of all wearable parts, inspection of structural components, and a stress-test.

To ensure your products are OEM compliant within the 24* month recertification window, contact us at recertification@spitzlift.com.

*SpitzLift reserves the right to reduce the recertification timeline based on type of usage.

DID YOU KNOW?

SPITZLIFT OFFERS A CRANE RECERTIFICATION PROGRAM

LIGHTWEIGHT

TOTAL IMPACT TO VEHICLE IS LESS THAN 100 LBS.

SAFE & EFFICIENT

• • • • • • • • • • • • • • • •

MITIGATES AGAINST INJURIES
AND INCREASES PRODUCTIVITY

ROBUST & RUGGED

LIFTS UP TO 1,000 LBS.

2

STANDARD VAN APPLICATIONS



CRANES

3ft. Fold-Down

Max. Load 650 lbs. Weight 45 lbs.



3ft. Standard Crane Side Door Specific

Max. Load 900 lbs. Weight 36 lbs.



3ft. Manual CraneReceiver Hitch Specific

Max. Load 900 lbs. Weight 36 lbs.





MOUNTS

8 in. Mount

Low | Medium Roof



26 in. Mount

3

High Roof



30 in. Mount

Low | Medium Roof

* COMPLETE VAN INSTALLATION KITS ARE INCLUDED FOR ALL FORD AND RAM APPLICATIONS. INSTALLATION HARDWARE KITS ARE OPTIONAL FOR ALL CHEVROLET/GMC, MERCEDES, AND NISSAN APPLICATIONS.

CHEVROLET / GMC SERVICE VAN SOLUTIONS



Chevrolet - Express GMC - Savana STANDARD ROOF 135 WB | 155 WB

Rear Options

OPTION 1 - GM 3 ft. fold-down crane

Side Door Options

OPTION 2 - GM - SD 3 ft. standard crane



FORD SERVICE VAN SOLUTIONS



Transit Connect

104WB | 120WB

Rear Options

OPTION 1 - FTC/104 3 ft. fold-down crane

OPTION 2 - FTC/120

3 ft. fold-down crane



Transit

DID YOU KNOW?

We have a large and growing

SpitzLift cranes are used

Thousands of SpitzLifts

are working hard daily

in 14 different countries.

all over the world.

global presence.

MEDIUM ROOF 130WB | 148WB

Rear Options

OPTION 1 - FT/MH 3 ft. fold-down crane

Side Door Options

OPTION 1 - FT/MH - SD 3 ft. fold-down crane

OPTION 2 - FT/MH - SD 3 ft. standard crane

Transit

LOW ROOF 130WB | 148WB

Rear Options

OPTION 1 - FT/L 3 ft. fold-down crane

Side Door Options

OPTION 1 - FT/L - SD 3 ft. standard crane



Transit

HIGH/EXT. HIGH ROOF 148WB

Rear Options

OPTION 1 - FT/MH 3 ft. fold-down crane

Side Door Options

OPTION 1 - FT/MH - SD 3 ft. fold-down crane

OPTION 2 - FT/MH - SD 3 ft. standard crane

MERCEDES SERVICE VAN SOLUTIONS





Sprinter

STANDARD ROOF 144WB | 170WB

Rear Options

OPTION 1 - MS 3 ft. fold-down crane

Side Door Options

OPTION 1 - MS - SD 3 ft. fold-down crane

OPTION 2 - MS - SD 3 ft. standard crane



Sprinter

HIGH/EXT. HIGH ROOF 144WB | 170WB

Rear Options

OPTION 1 - MS 3 ft. fold-down crane

Side Door Options

OPTION 1 - MS - SD 3 ft. fold-down crane OPTION 2 - MS - SD 3 ft. standard crane



SPITZLIFT

Not just for rear-door applications.
Utilizing the side-door is an ideal option to increase the overall functionality of service vans.



Sprinter

SUPER HIGH 144WB | 170WB

Rear Options

OPTION 1 - MS/H 3 ft. fold-down crane

Side Door Options

OPTION 1 - MS/H - SD 3 ft. fold-down crane OPTION 2 - MS/H - SD 3 ft. standard crane

NISSAN SERVICE VAN SOLUTIONS



NV Cargo HIGH ROOF 146WB

Rear Options

OPTION 1 - NV/H 3 ft. fold-down crane

Side Door Options

OPTION 1 - NV/H - SD 3 ft. standard crane

NO NEED TO COMPROMISE

SpitzLift cranes are compact, take up minimal cargo space, and are easily spec'd in to most any up-fit.

WHY CHOOSE

between shelving, other accessory items, and a SpitzLift, when you can have it all?



NV Cargo STANDARD ROOF 115WB | 146WB

Rear Options

OPTION 1 - NV/S 3 ft. fold-down crane

Side Door Options

OPTION 1 - NV/S - SD 3 ft. standard crane



9



RAM SERVICE VAN SOLUTIONS



Promaster LOW ROOF

118WB | 136WB

Rear Options

OPTION 1 - PM 3 ft. fold-down crane

Side Door Options

OPTION 1 - PM - SD 3 ft. fold-down crane OPTION 2 - PM/H - SD 3 ft. standard crane



Promaster

HIGH ROOF 136WB | 159WB

Rear Options

OPTION 1 - PM/H 3 ft. fold-down crane

Side Door Options

OPTION 1 - PM - SD 3 ft. fold-down crane OPTION 2 - PM/H - SD 3 ft. standard crane

FOLD-DOWN CRANES

Our 3-foot fold-down crane is especially well-suited for service vans and enclosed service bodies. When not in use, the crane stores neatly out of the way to not interrupt workflow or take up valuable cargo space. With easy set up and operation, our fold-down cranes are an ideal addition to any enclosed service vehicle.



Promaster EXT. HIGH ROOF

EXT. HIGH ROC 159WB

Rear Options

OPTION 1 - PM/H 3 ft. fold-down crane

Side Door Options

OPTION 1 - PM - SD 3 ft. fold-down crane OPTION 2 - PM/H - SD 3 ft. standard crane

ENCLOSED SERVICE BODY



CRANES

3ft. Fold-Down

Max. Load 650 lbs. Weight 45 lbs.



PERMANENT MOUNTS

REMOVABLE

MOUNTS

8 in. Mount

Low | Medium Roof



16 in. Mount

Low | Medium Roof



26 in. Mount

High Roof



3ft. Crane

Max. Load 900 lbs. **Weight 36** lbs.



30 in. Mount

Low | Medium Roof



Fold-Down 37 in. Mount

High Roof





Low / Medium

Door Opening: 49 in. - 57 in. High

OPTION 1 - ESB - P8 3 ft. standard crane - Permanent OPTION 2 - ESB - R16 3 ft. standard crane - Removable OPTION 3 - ESB - P30 3 ft. fold-down crane - Permanent



High Roof Door Opening: 72 in. - 75 in. High

14

OPTION 1 - ESB - R37 3 ft. fold-down crane - Removable OPTION 2 - ESB - R26 3 ft. standard crane - Removable OPTION3 - ESB - P30

3 ft. standard crane - Permanent

SERVICE BODY



CRANE 4ft. Standard

Max. Load 900 lbs. Weight 40 lbs.

VERSATILE

We offer four different mounting systems for service body trucks making it easy to accommodate a multitude of applications.

FUNCTIONAL

Exponentially increase functionality by installing multiple mounting solutions.



Corner

MOUNTS

Right or Left rear corner



Double Corner

Right or Left rear corner



Top

Tool Box Top



Bed

Right or Left rear corner





Corner

OPTION 1 - SB/L 4 ft. standard crane OPTION 2 - SB/R 4 ft. standard crane



Double Corner

OPTION 3 - SB 4 ft. standard crane



Top

OPTION 4 - SB 4 ft. standard crane



Bed

OPTION 5- SB 4 ft. standard crane

PICKUP TRUCKS



CRANES

4ft. Standard

Max Load 900 lbs. Weight 40 lbs.



4ft. Manual

Max Load 900 lbs. Weight 35 lbs.









MOUNTS

15x15 Surface Mount Plate

For All Models

Ford Specific (2017 forward)

17

Ford 150

Ford 250 Ford 350

Ford Specific (2017 forward) Receiver Hitch

For All Models







Universal

OPTION 1 4 ft. standard crane OPTION 1M

4 ft. standard crane (Manual) F150

OPTION 2 4 ft. standard crane OPTION 2M 4 ft. standard crane (Manual) F250 | F350

OPTION 3
4 ft. standard crane
OPTION 3M
4 ft. standard crane

18

(Manual)



Receiver Hitch

OPTION 4M 4 ft. standard crane (Manual)

PLATFORM TRUCKS & TRAILERS



CRANES

4ft. Standard

Max Load 900 lbs. Weight 40 lbs.



MOUNTS

10x12 Surface Mount Plate

Universal



4ft. Manual

Max Load 900 lbs. Weight 35 lbs.



Bolt-on / Weld-on

Universal

19





Surface Mount

OPTION 1 4 ft. standard crane - DC OPTION 1M 4 ft. standard crane - Manual




Bolt-on / Weld-on

OPTION 2 4 ft. standard crane - DC OPTION 2M 4 ft. standard crane - Manual

OFF VEHICLE APPLICATIONS





Max Load 650 lbs. Weight 37 lbs.

CRANES

MOUNTS



3ft. Crane

Max Load 900 lbs. Weight 38 lbs.



4ft. Fold-Down

Max Load 650 lbs. Weight 39 lbs.



4ft. Crane

Max Load 900 lbs. Weight 40 lbs.

^{*} MANUAL CRANE AVAILABLE IN 3FT AND 4FT MODELS



Post Masts



Bolt-On Weld-On



Universal Horizontal



Universal Vertical Mount

From posts to ship hulls, the Universal Vertical Mount provides a sturdy alternative mounting system for areas where eligible mounting surfaces may be scarce. The vertical mount can be attached to almost any solid surface that has structural integrity.



Universal Horizontal Mount

The Universal Horizontal Mount can be used for a variety of applications and is suitable for any solid flat surface; including concrete decks, trailers, and more.

Custom Applications

We are ready to assist you with special projects. Our engineering team has a successful track record of meeting custom application needs and exceeding customer expectations.





Off-Vehicle Application Evaluation

Call us for an evaluation of your off-vehicle applications so we can provide the optimal lifting solution.



619.713.5061

^{*} MOUNTS AVAILABLE WITH 16 INCH OR 26 INCH POST MAST; 37 INCH POST MAST FOR FOLD DOWN CRANE MODELS































Phone (619) 713-5061

Email

Customer Service: customerservice@spitzlift.com

Sales: info@spitzlift.com

Fleet Support: fleetsupport@spitzlift.com

Engineering: engineering@spitzlift.com

Accounting: accounting@spitzlift.com

Sales Orders: orders@spitzlift.com

Safety Training: safetyfirst@spitzlift.com

CONTACT SPITZLIFT

SpitzLift.com



Facebook @SpitzLiftManufacturing



Instagram @SpitzLift



Twitter @SpitzLift1