


SPITZLIFT ENCLOSED SERVICE BODY PACKAGE - 26" REMOVABLE PEDESTAL

RIGHT SIDE (CURB SIDE) OR LEFT (DRIVER SIDE) ESB-R26



- a** 3FT SPITZLIFT CRANE
LTD-324
- b** PIVOT TUBE
ZLTPT-2
- c** PIVOT BASE
KPHBS-026
- d** PEDESTAL
KBP-1012H
Hardware Kit Included

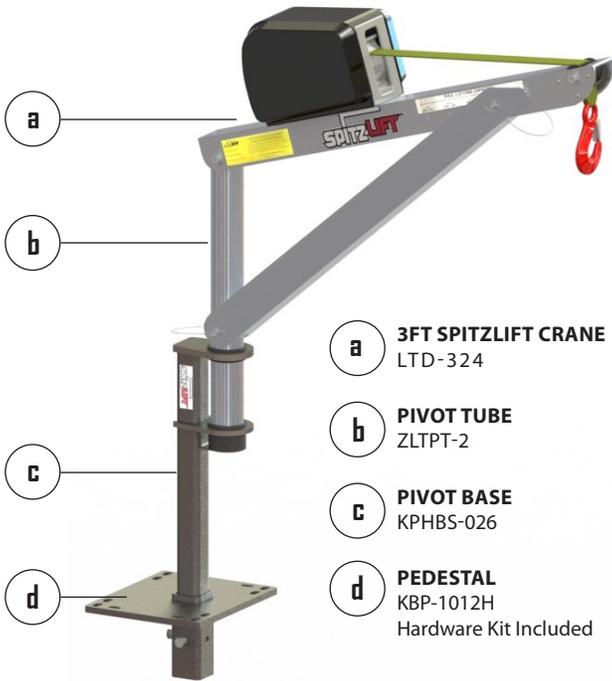

3 FT SPITZLIFT CRANE - DC POWERED	SPECIFICATIONS
MAX LIFTING CAPACITY	900 LBS (408.2 KG)
MANUFACTURING STANDARDS	COMPLIANT WITH OSHA AND ASME STANDARDS
ROTATION	360°
WEBBING OR WIRE ROPE	20' (609.6 CM) 50' (1524 CM)
LIFTING SPEED	22'6" (6.858 M)/MIN (0.11/SEC)
REMOTE LANYARD	10' (304.8 CM)
INSTALLED WEIGHT	APPROX. 68 LBS (30.8 KG)
POWER REQUIREMENTS	12V DC @ 70 AMPS 120V AC @ 7 AMPS
STANDARD FINISH	CLEAR ANODIZED POWDER COATED
MATERIAL	AIRCRAFT GRADE ALUMINUM & STEEL
WARRANTY	3 YEARS LIMITED



Pendant Controller *

PART#: 25559-REMOTE10HK




Quick Connect *

PART#: 24085



DC Wiring Harness *

PART#: 24049



Hardware Kit

PART#: KBP-1012H

*Included with DC powered units