


SPITZLIFT ENCLOSED SERVICE BODY PACKAGE - 30" PEDESTAL

RIGHT SIDE (CURB SIDE) | LEFT (DRIVER SIDE) KBPSRG-010-030
DC (OPTION 3 - ESB-P30)



- a** 3FT SPITZLIFT FOLD-DOWN CRANE LTD-3QRT (DC)
- b** PIVOT TUBE Z-LTPT13
- c** PEDESTAL Reinforcement Installation Kit and Hardware Included KBPSRG-010-030/KBP-1012H

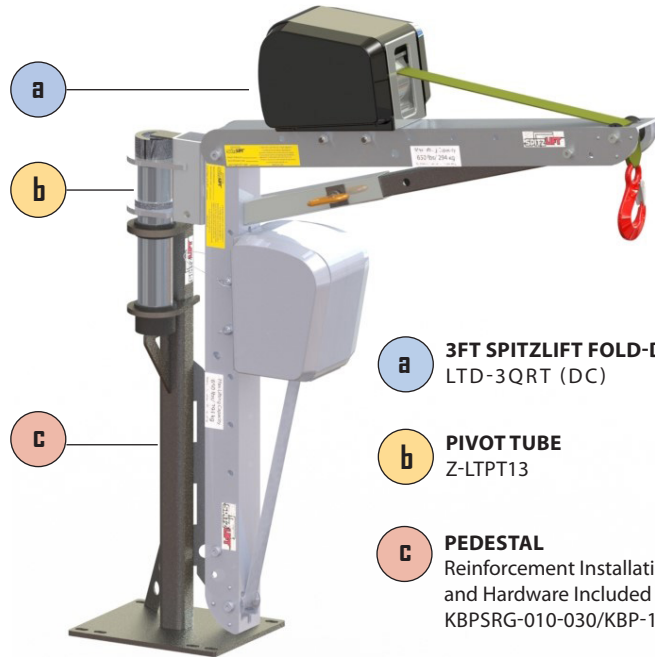

3 FT SPITZLIFT FOLD-DOWN CRANE - DC POWERED	SPECIFICATIONS
MAX LIFTING CAPACITY	650 LBS (294.8 KG)
MANUFACTURING STANDARDS	COMPLIANT WITH OSHA AND ASME STANDARDS
ROTATION	360°
WEBBING OR WIRE ROPE	20' (609.6 CM) 50' (1524 CM)
LIFTING SPEED	DC - 22'6"(6.858 M)/MIN (0.11/SEC)
DC PENDANT CONTROLLER	10' (304.8 CM)
INSTALLED WEIGHT	DC - APPROX. 89 LBS (40.4 KG)
POWER REQUIREMENTS	12V DC @ 70 AMPS
STANDARD FINISH	CLEAR ANODIZED POWDER COATED
MATERIAL	AIRCRAFT GRADE ALUMINUM & STEEL
WARRANTY	3 YEARS LIMITED



DC Pendant Controller

PART#: 25559-REMOTE10HK
Length: 10' (304.8 CM)




DC Quick Connect

PART#: 24085-4
Length: 4' (121.9 CM)



DC Wiring Harness

PART#: 24049
Length: 25' (762 CM)



Reinforcement Kit

PART#: KBP-1012H

*Manual Handcrank Option available upon request.